



Chemical Additives to Optimize Black Liquor Recovery Throughput and Increase Campaign Life


Chris Smyrniotis – Vice President, Chemical Technologies



Agenda


- Deposit formation in black liquor recovery boilers
 - Fate of black liquor droplets
 - Composition of carryover and deposits
 - Deposition mechanism
- Chemical additives
 - What are they?
 - Targeted application
 - Operation mechanism
- Case studies
 - Twenty years of continuous operation
 - Most Recent

Fate of Black Liquor Droplets

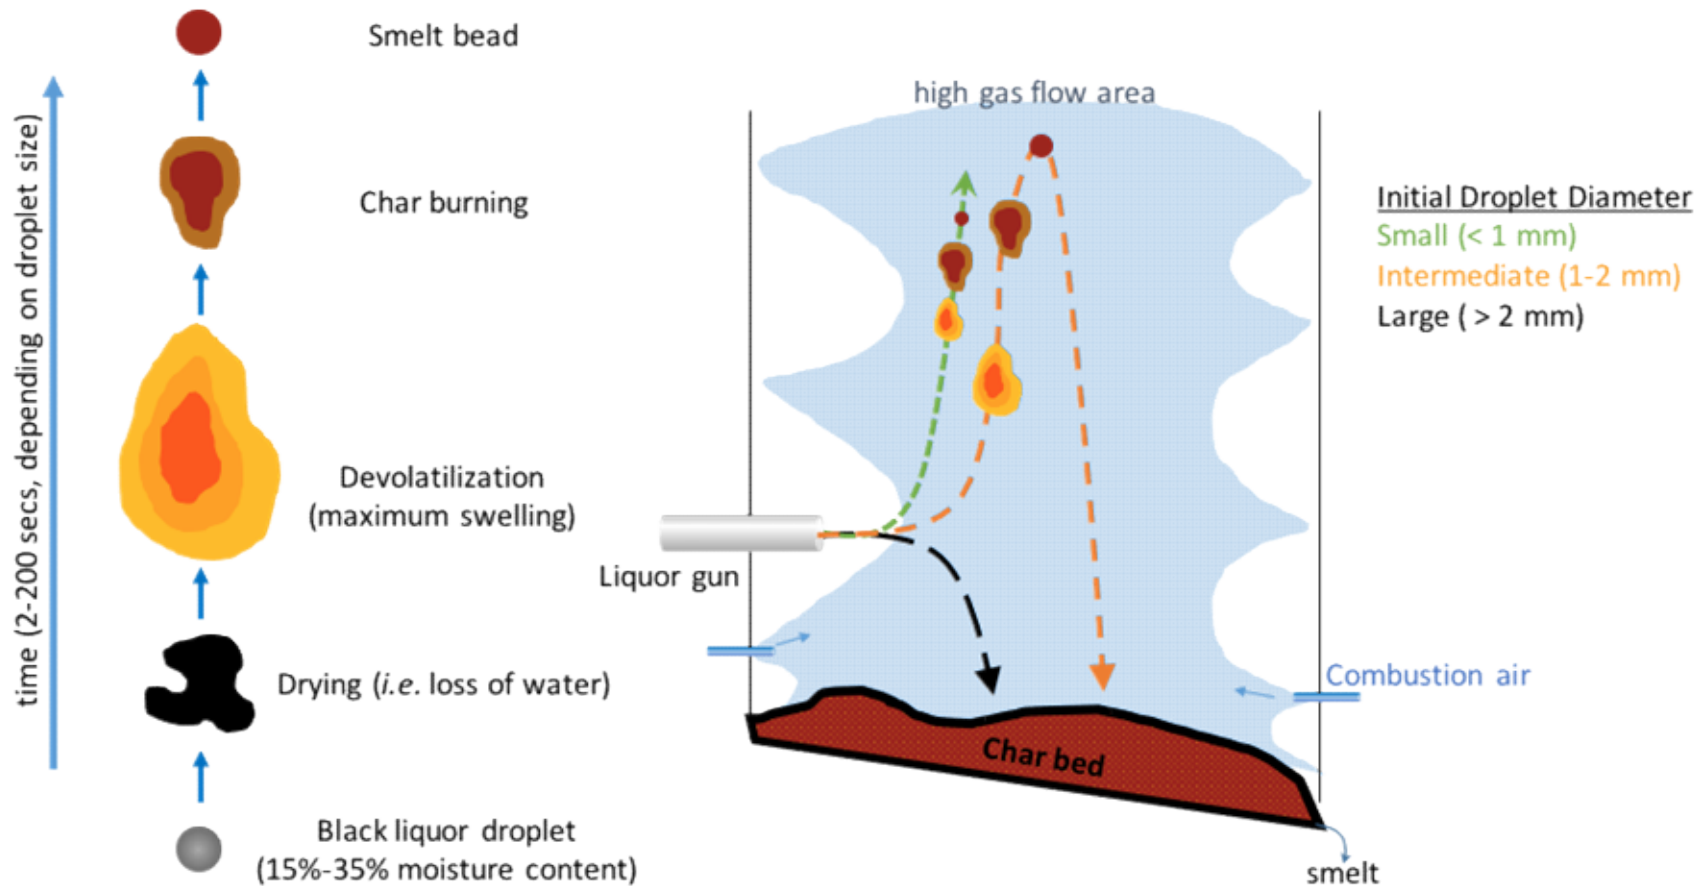



References: (a) Hupa, M., Solin, P., Hyöty, P., "Combustion behavior of black liquor droplets," *J. Pulp Paper Sci.*, 13(2):J67-72 (1987). (b) Frederick, W.J., Hupa, M., "Optical pyrometric measurements of surface temperatures during black liquor char burning and gasification," *Fuel*, 73(12):1889-1894 (1994).

Recovery Boiler Fouling Causes

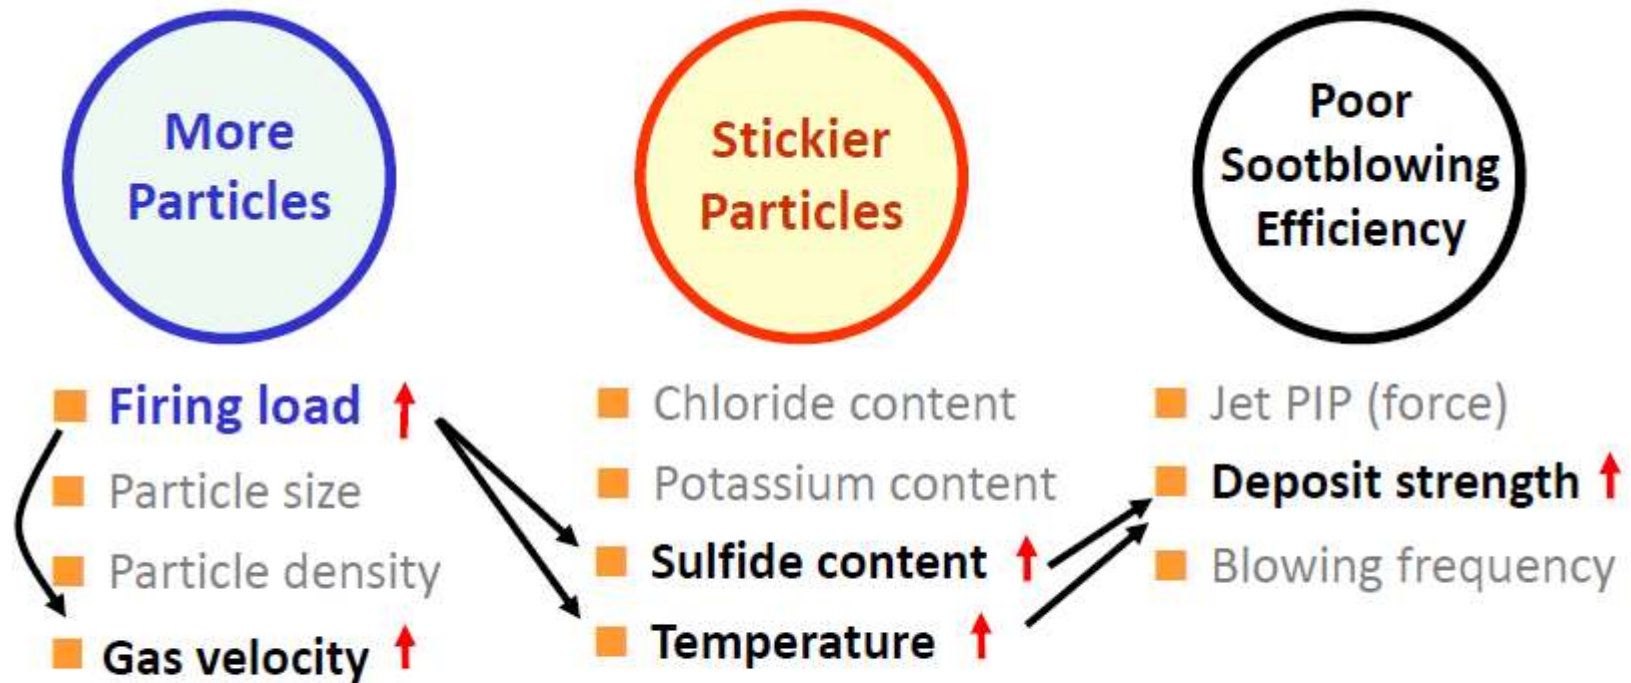

Load is the most important variable affecting fouling!


Melting Characteristics of Deposits

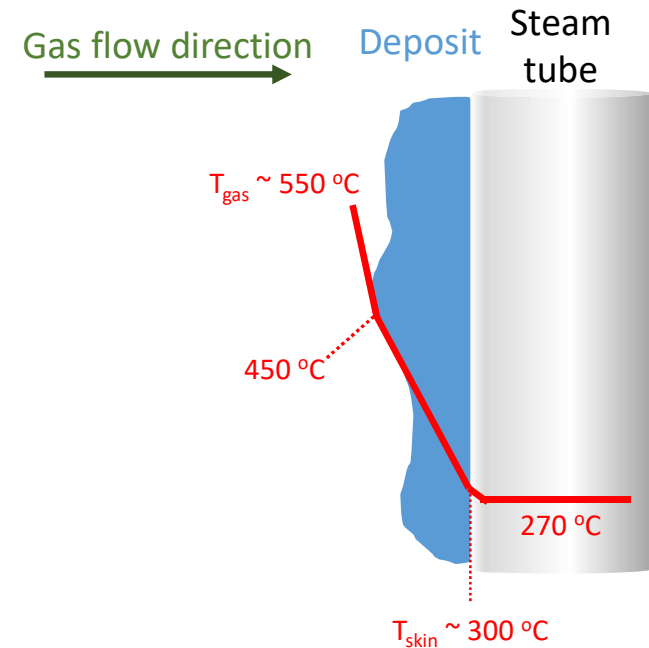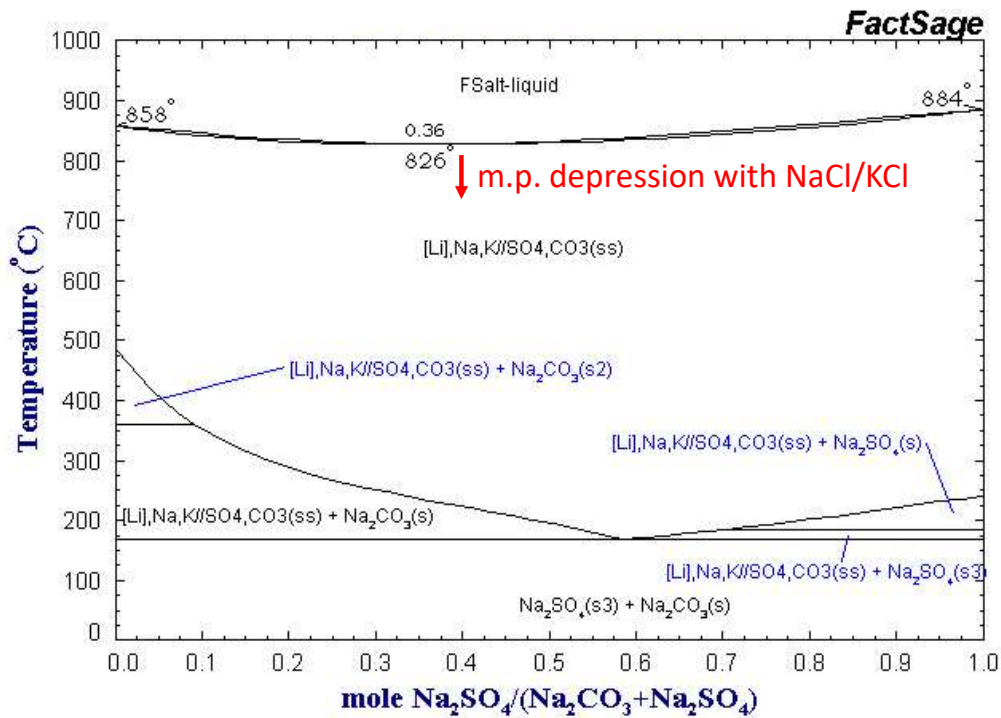


- Melting temperature between 825 °C (1517 °F) and 885 °C (1625 °F)
 - NaCl and KCl depress the melting point (*e.g.* fluxing agent) to 626 °C (1159 °F), plasticizing agents
- Partially molten (*i.e.* “sticky”) inorganic salts condense on cooler heat transfer surfaces
 - As deposit grows, leading edge approaches surrounding gas temperature
 - Leading edge can be “sticky,” adhering additional particles and carryover
- Deposits sinter into dense masses at $T > 450^\circ\text{C}$

Deposit Removal


- Motive force is critical to deposit removal
 - Sootblowers, sonic horns, impulse cleaners, etc.
- Sootblowers are often ineffective when:
 - Deposits sinter into dense masses
 - Deposits are above their fluid or plastic temperatures
- Chemical additives alter deposit physical characteristics
 - Microscopic: pore structure, local melting temperature
 - Macroscopic: pore structure, compression strength

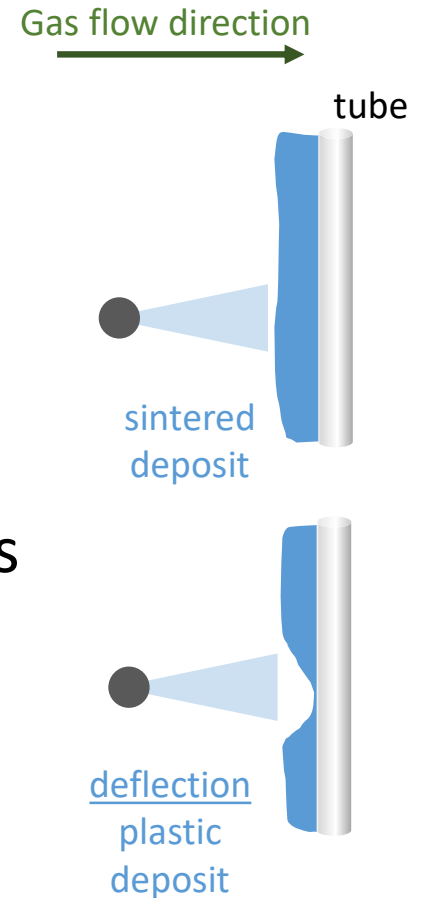

Modification of Deposit Physical Properties

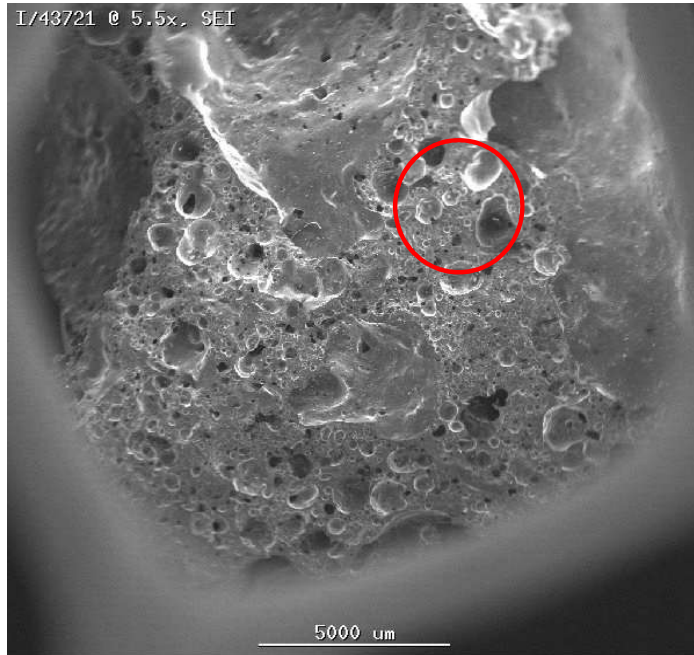


Numerous small pores with thick pore walls

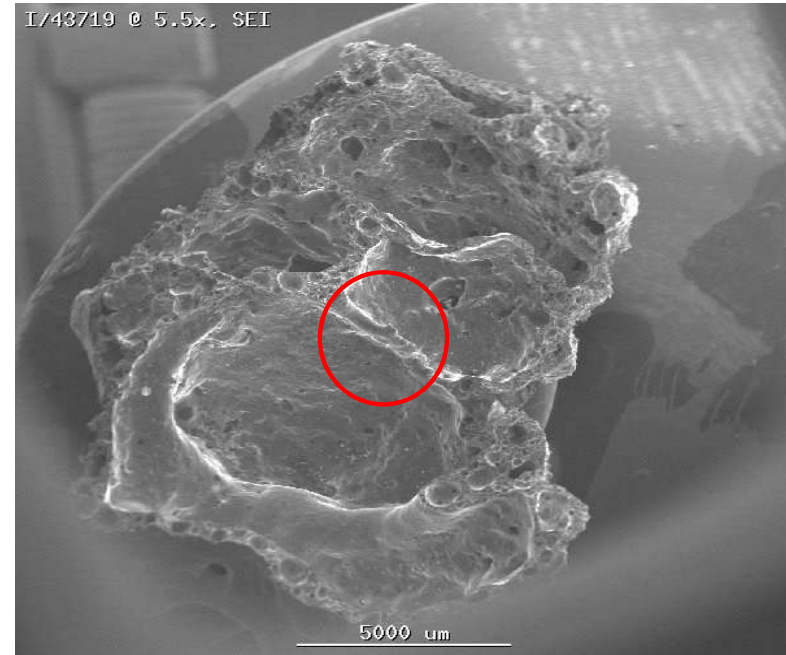

Large pores with thinner pore walls

- Addition of Mg(OH)₂ modifies deposit pore structure
 - Untreated deposits contain numerous small pores with thick walls
 - Treated deposits contain larger pores with thinner walls in between adjacent pores

Modification of Deposit Physical Properties

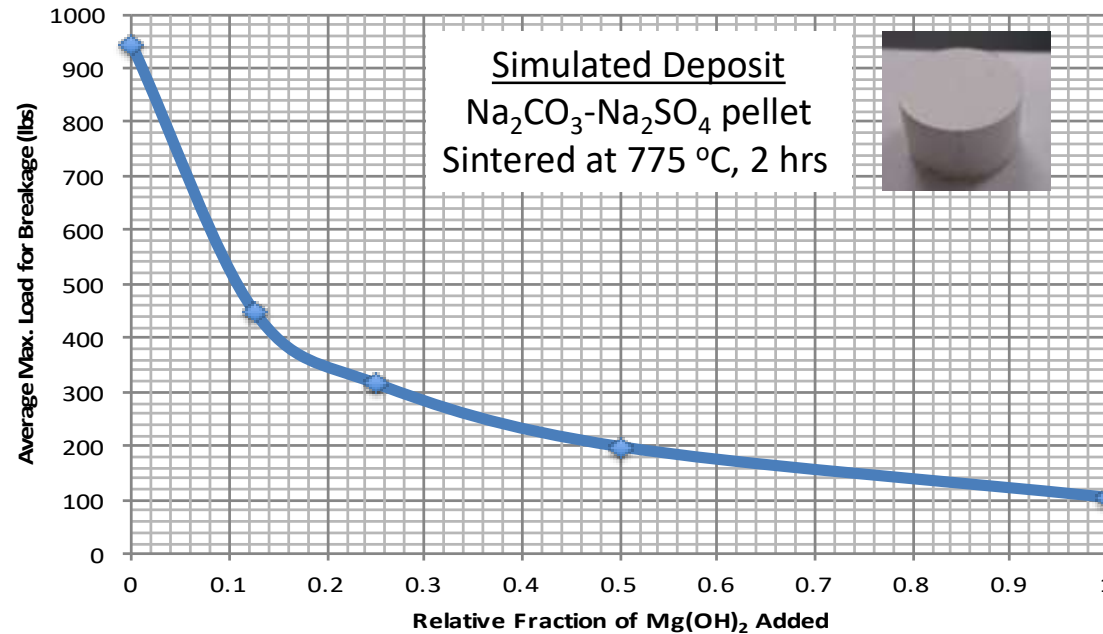


- Microscopic-scale phenomena impact bulk properties
 - Force required to break sintered pellet decreases with increasing additive dose


Targeted Application

Targeted Program Application


Gas Flow Dynamics

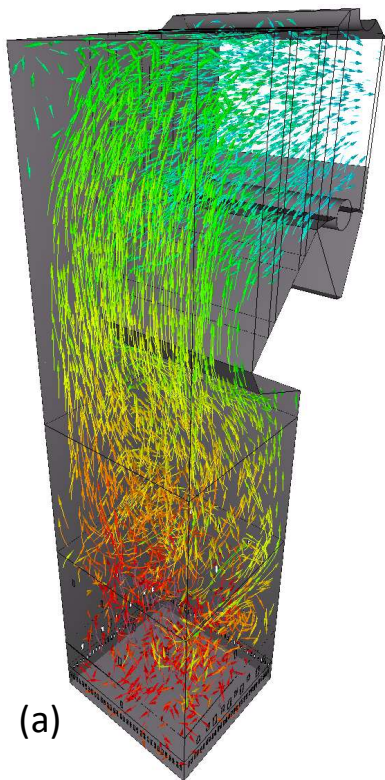

Prediction of Problem Areas

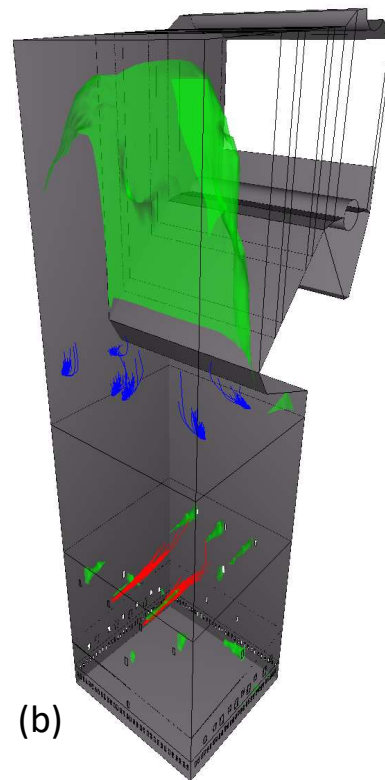


Targeted $Mg(OH)_2$ Application

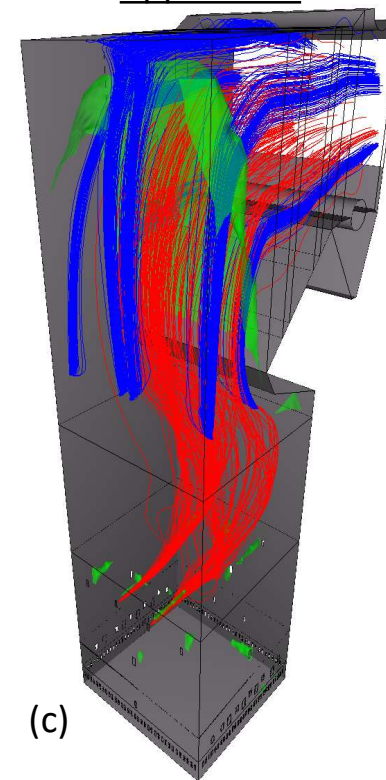


Chemical Coverage in Problem Areas

Coverage Entering Generating Bank – Dosage: 0.9 lb/ton


Fuel Case: Softwood
Solids Firing: 4.1MMlb/D

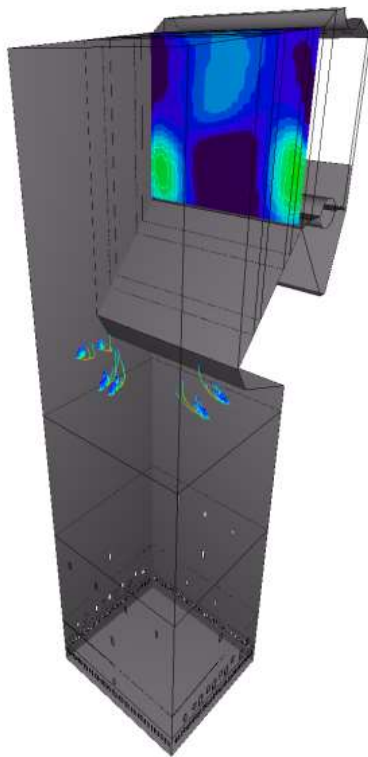

6 injector array

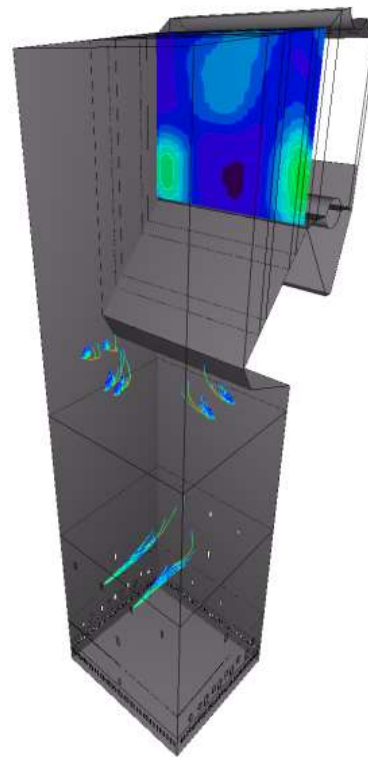

8 injector array

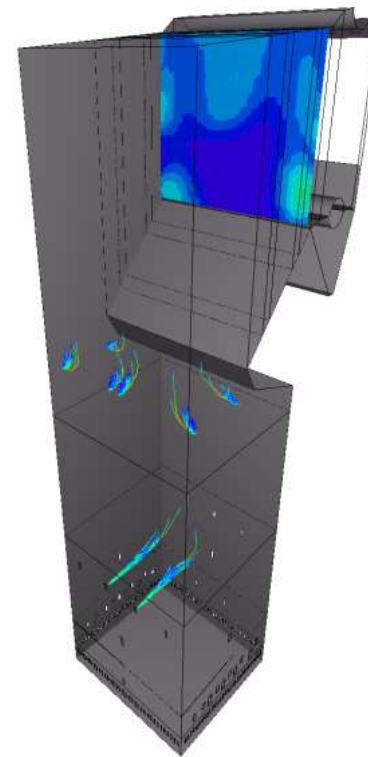

Optimized array

RECOVERY-CHEM[®] Recovery Boiler Technology

Program Application:

- The chemical program is injected into the fireside of the boiler at specific locations based on Fuel Tech's CFD model of the boiler.




Chemical Injection Technology




- Tunable droplet size characteristics
 - Fine mist for rapid evaporation and activation of $\text{Mg}(\text{OH})_2$ particles

Case Studies


Baseline Data (1995) – Without RECOVERY-CHEM

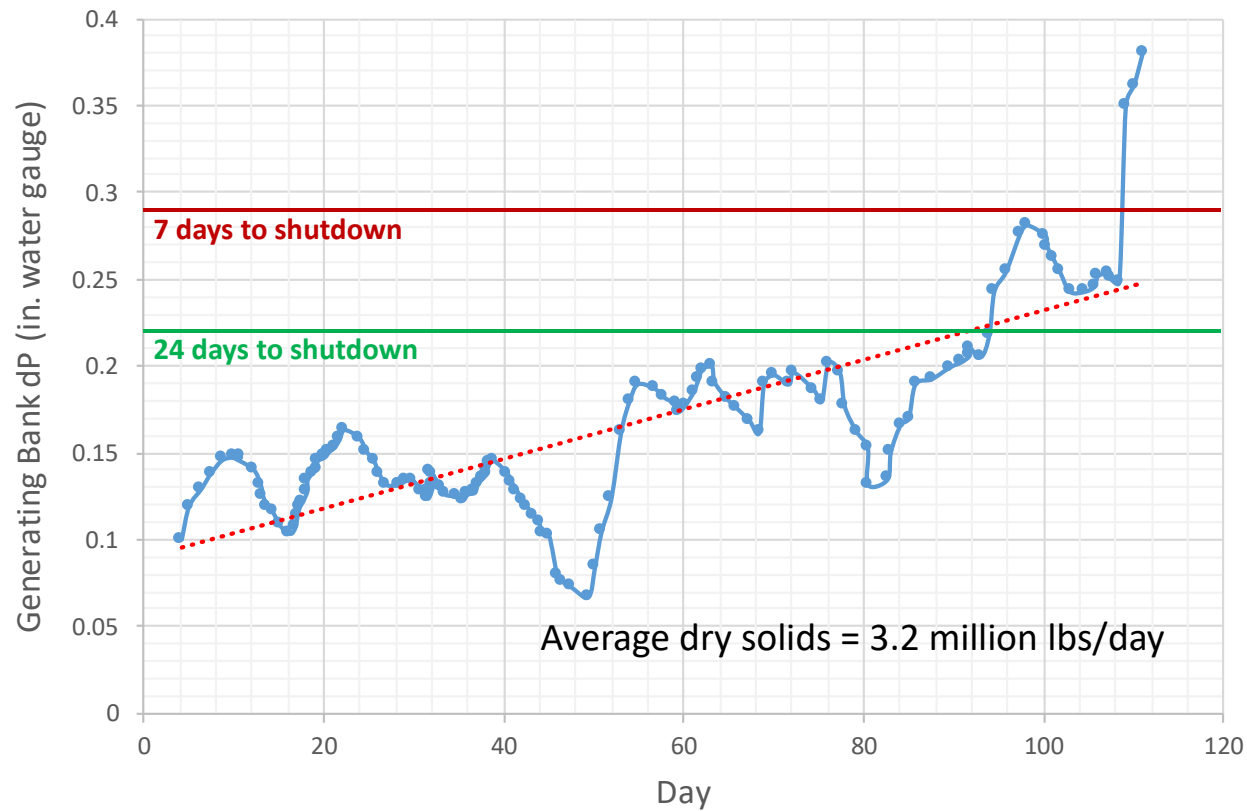


Treatment Extends Campaign Life

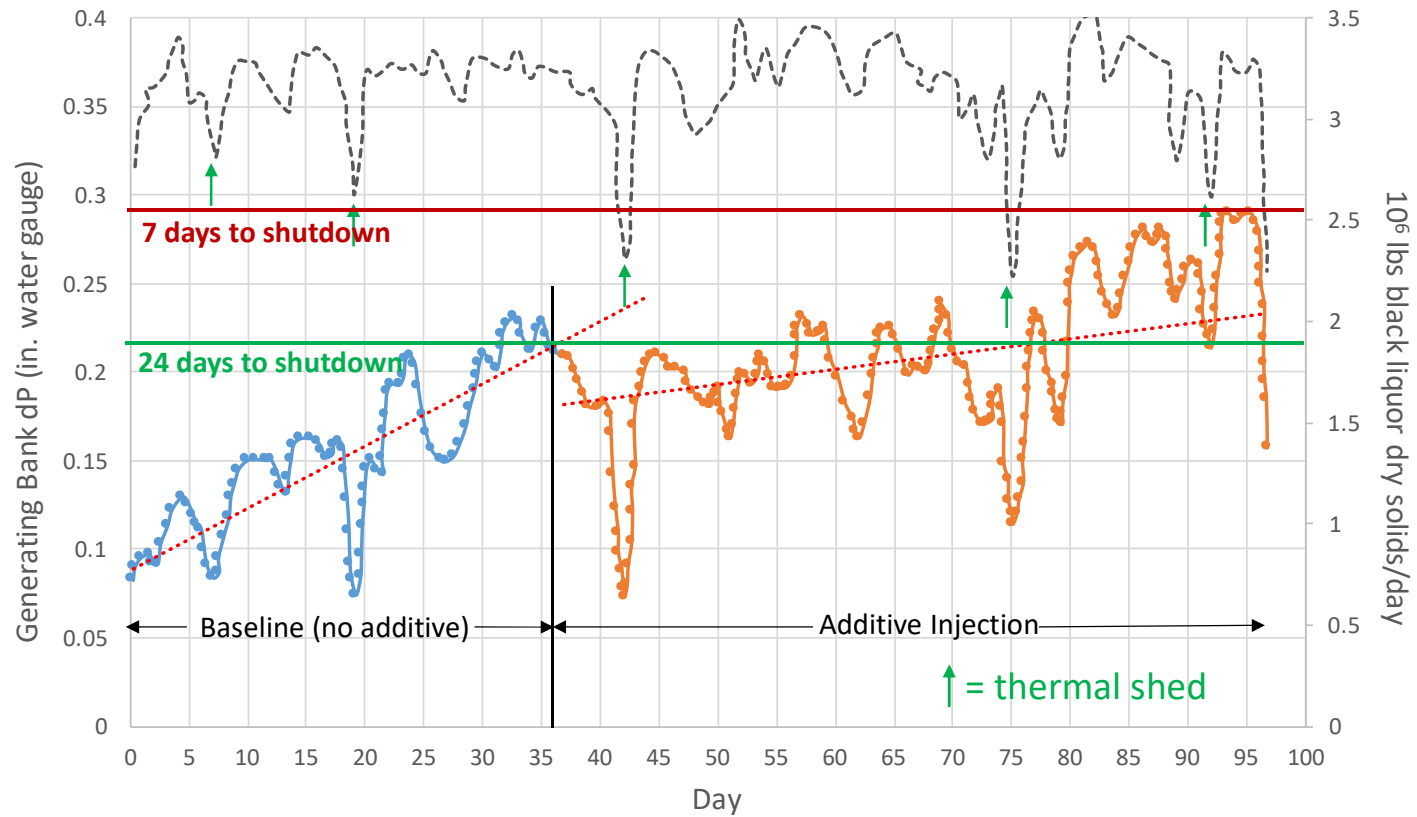


Run 3

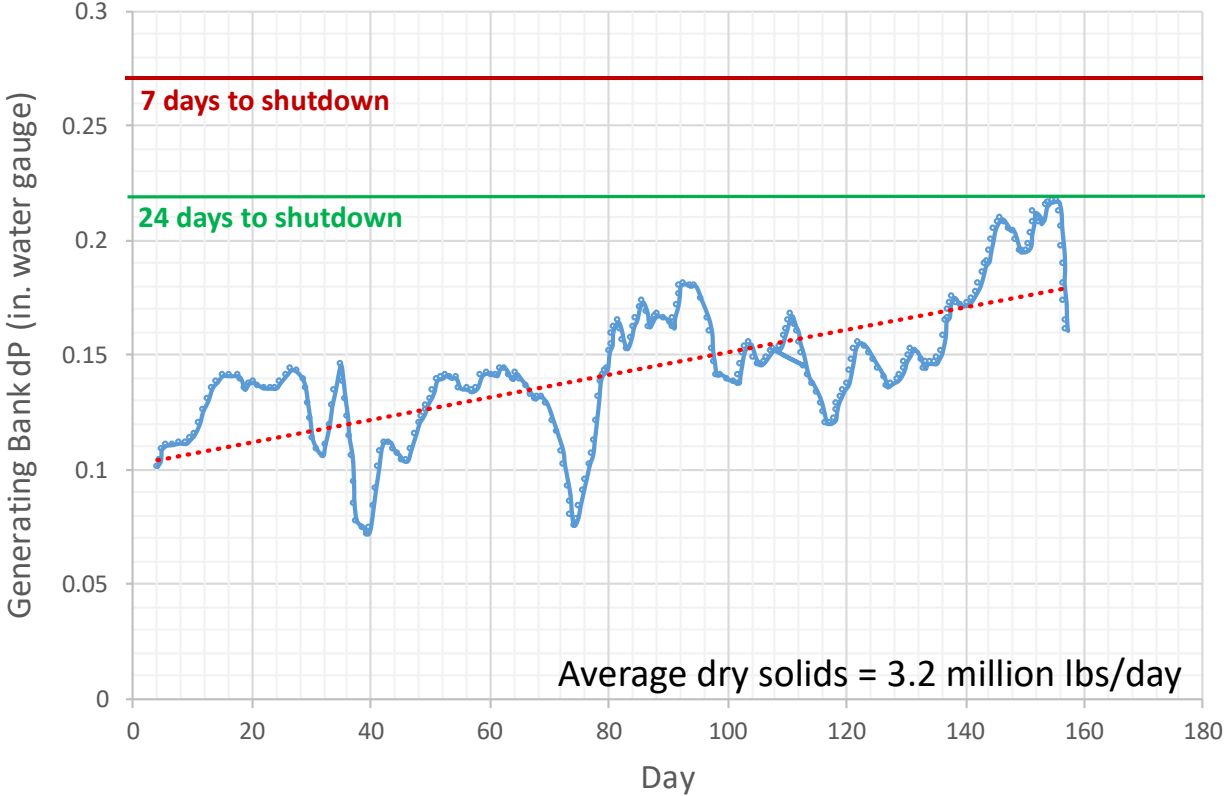


Dosage Optimization Trials : Fine Tuning

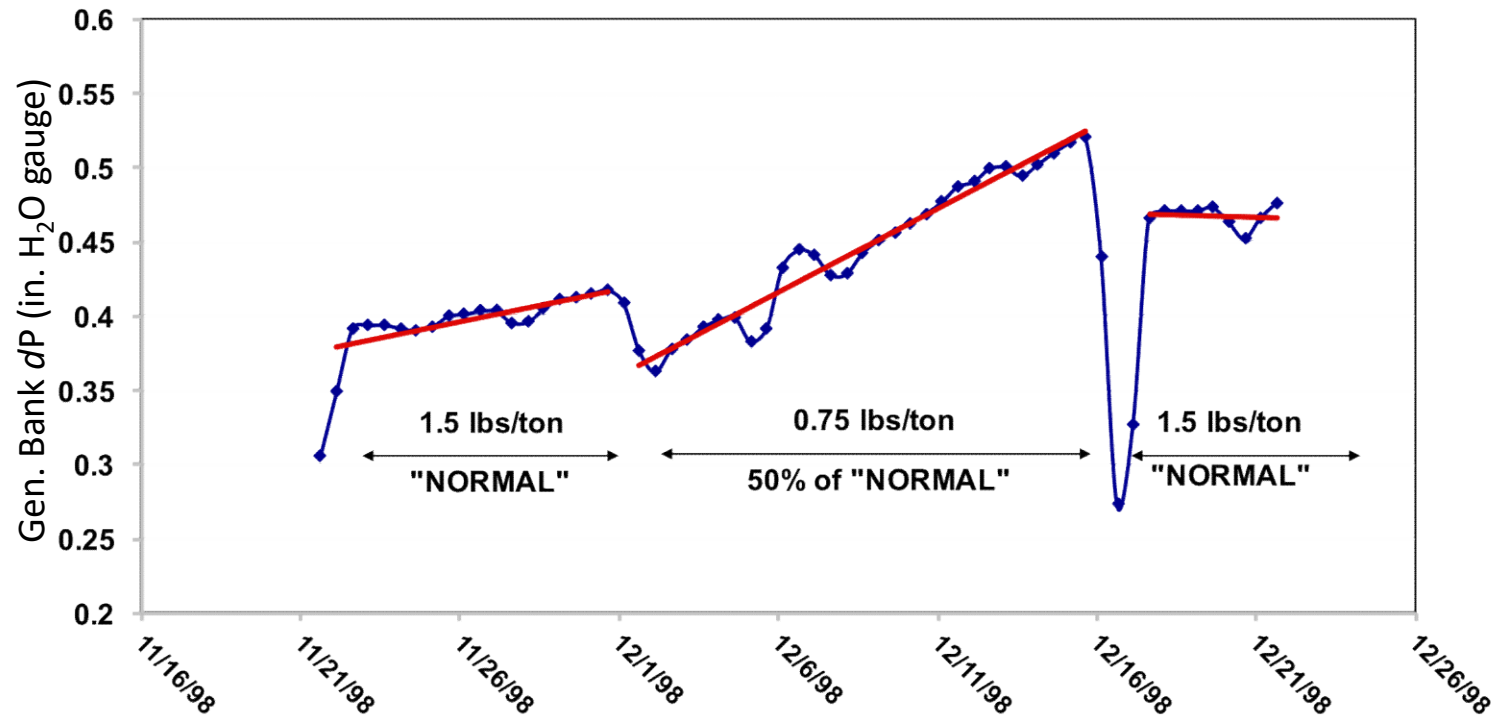

Dosage Optimization Trials : Fine Tuning

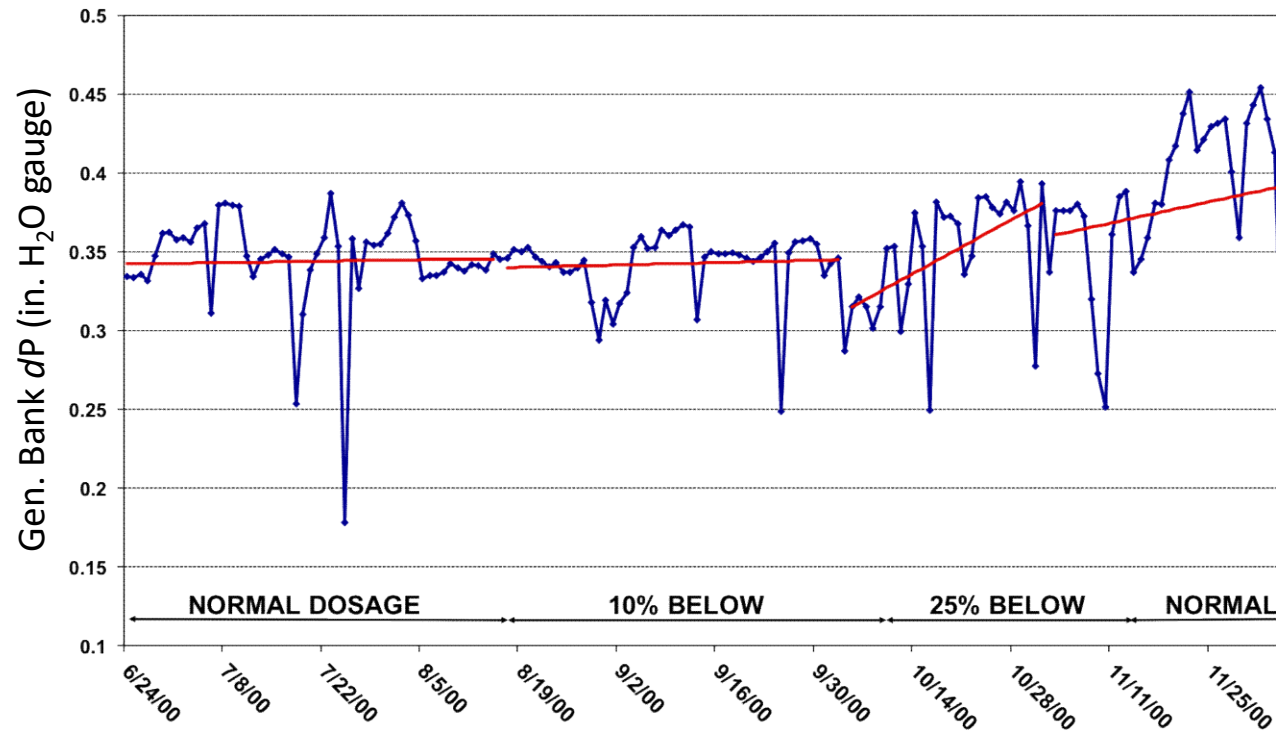


Dosage Optimization Trials : Reversal

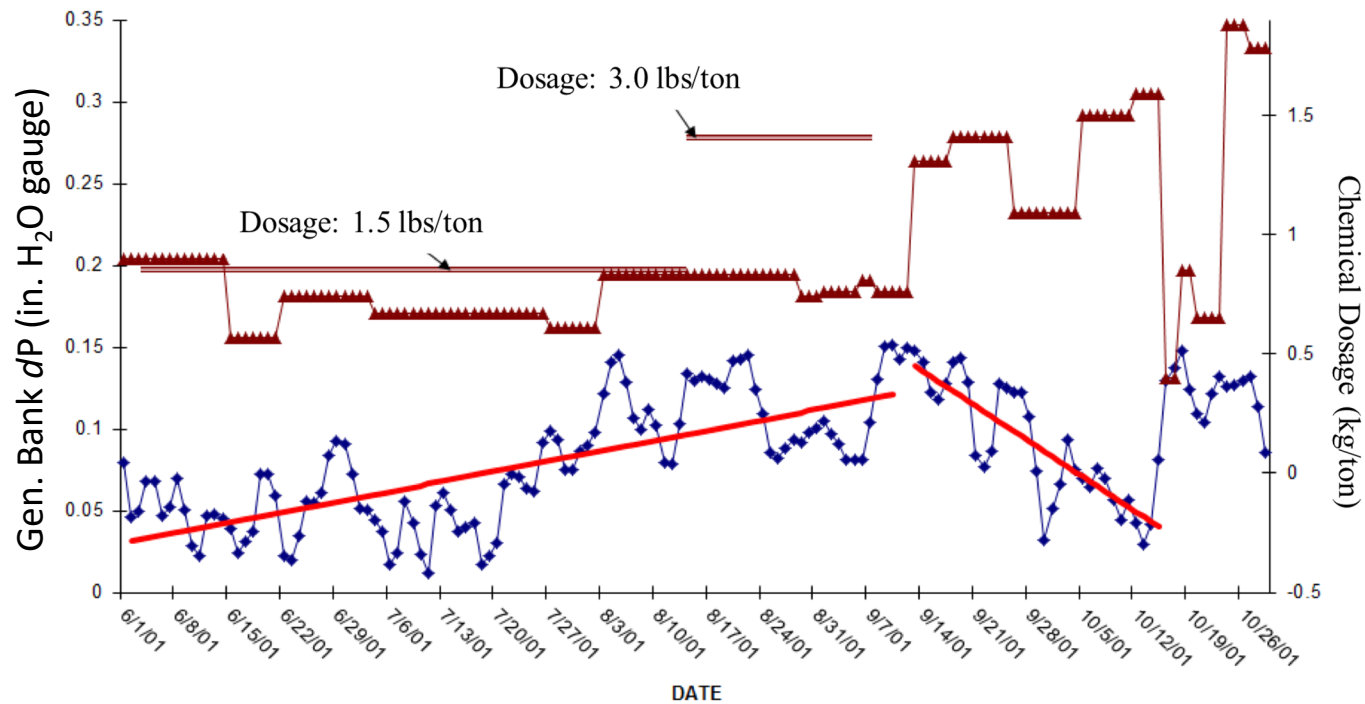


- dP increase can be reversed with increased chemical injection

Increased Campaign Life

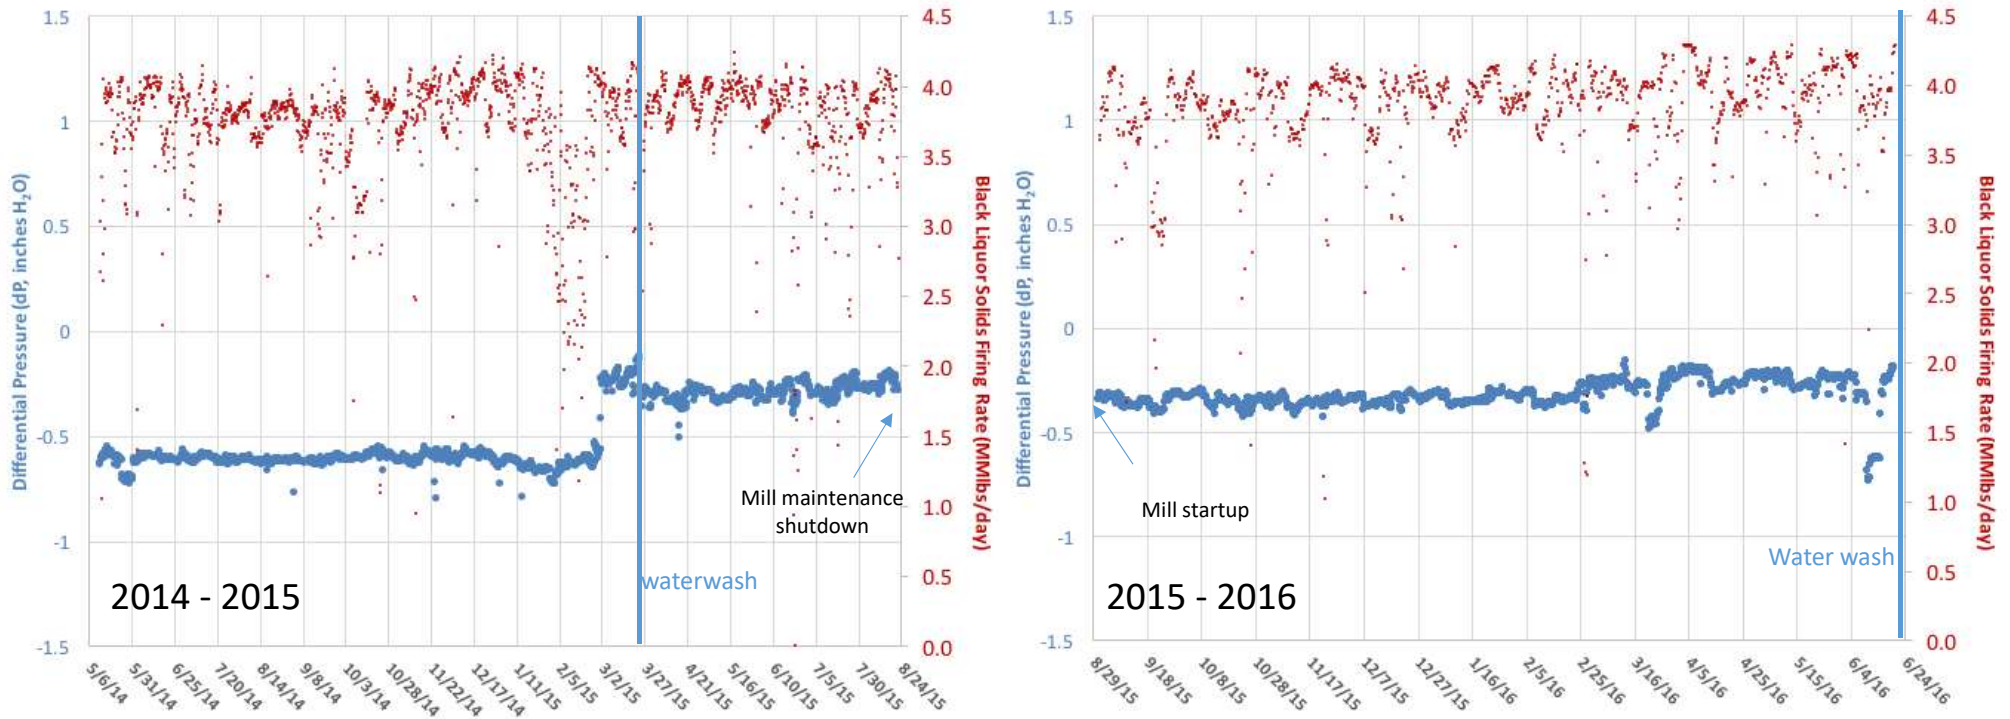

- 11 month run completed with 4.07 MM lbs/day of BL dry solids firing

Recent Demonstration Data

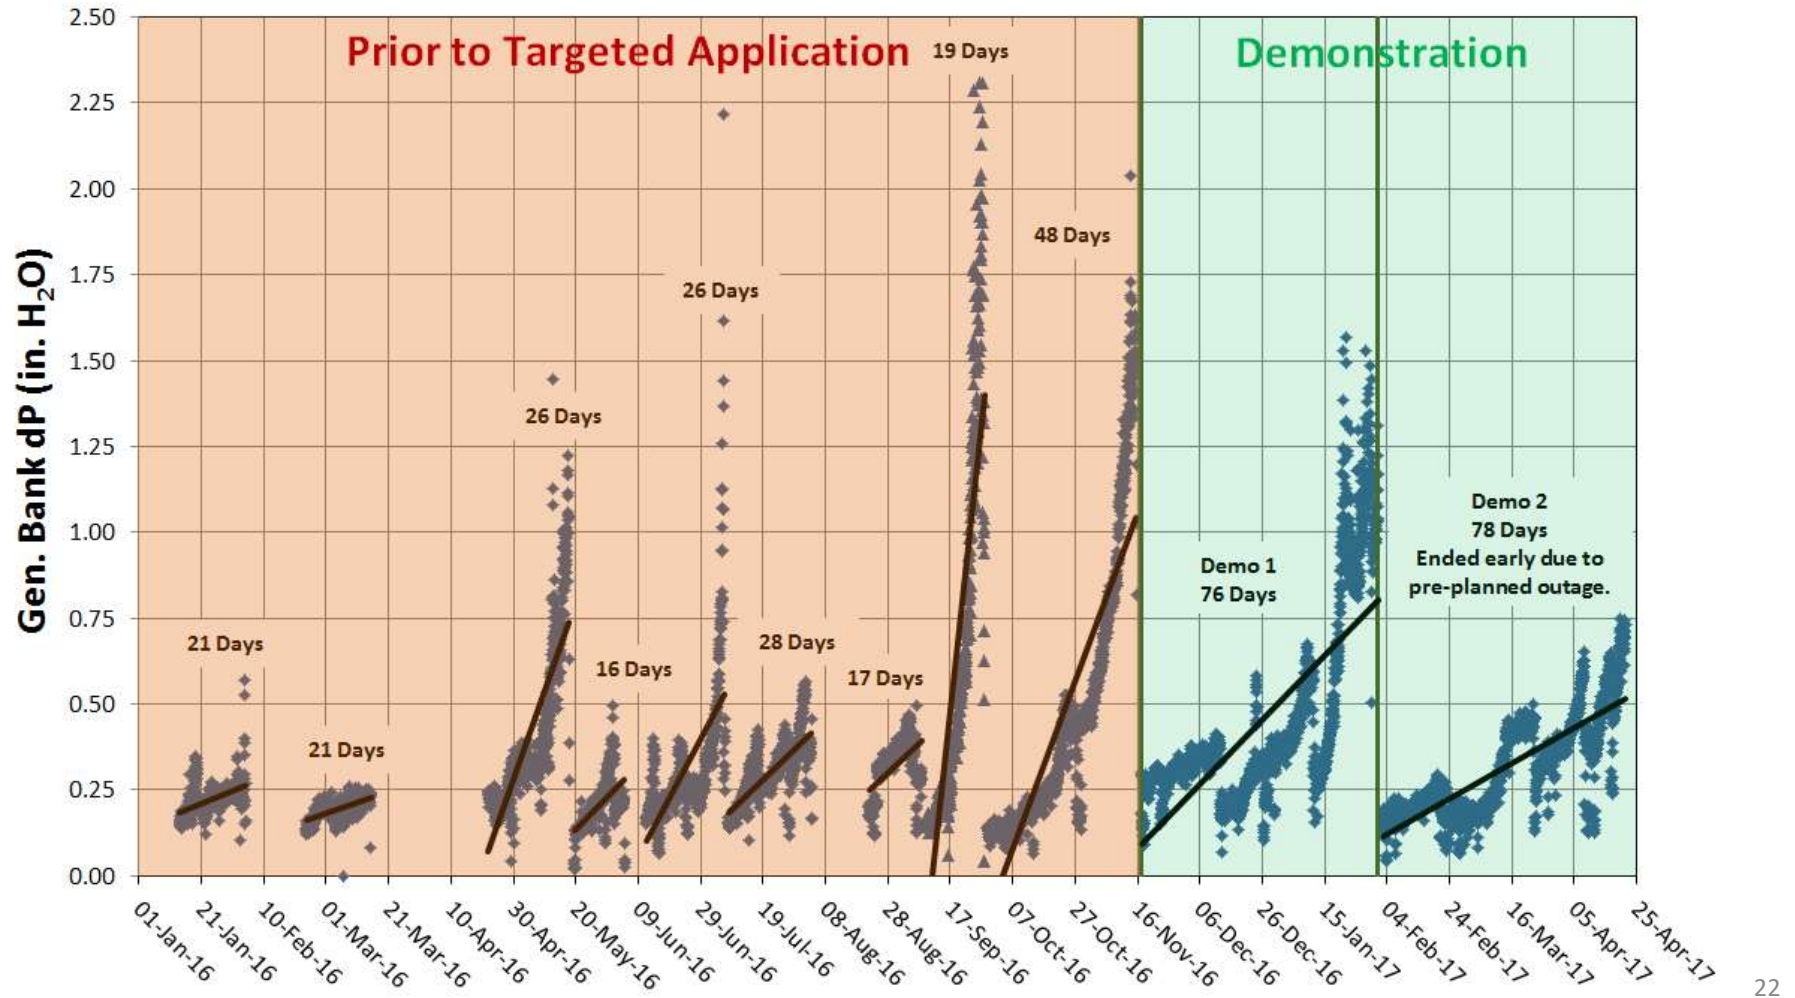

Summary

- Sodium salts in the recovery unit deposit on heat transfer surfaces and sinter at $T > 450\text{ }^{\circ}\text{C}$ (842 °F)
- Sootblowers lose efficiency as deposits continue to grow and sinter
- $\text{Mg}(\text{OH})_2$ injection reduces deposit strength
 - Sootblowers are more effective
- Mechanical upgrades and operational changes to increase throughput greatly benefit from deposit control programs
 - **Mechanical upgrades increase throughput**
 - **Chemical additives maintain a clean boiler to sustain increased throughput**
- Twenty years of operating experience
 - Have increased campaign life from 60 days to 330 days
 - Decreased “chill and blow” frequency by 50%-75%
 - Additional studies continue trend towards improved performance

Thank you!

Chris Smyrniotis
csmyrniotis@ftek.com
(630) 845-4461